

# BX-230 TUNNEL CRATE WASHER



## TECHNICAL SPECIFICATIONS

Crates/hour	max 230
Power supply	240/415V/3N
Wash pump	2kW
Booster heater	24kW
Wash tank heater	12kW
Total power	36kW
Wash tank capacity	110ltrs
Rinse water consumption (per hour)	280ltrs
Min/max water pressure * <sub>1</sub>	200/600kPa
Min/max water temp * <sub>2</sub>	55/70°C
Useful passage	510w x 500h mm
Weight (shipping)	375kg
Dimension (shipping)	255L x 90W x 200H
Water connection	3/4" (hose)
Drain diameter	50mm


## STANDARD FEATURES

- Electrical or Steam heated
- Double skinned construction
- Stainless steel filters
- Easy clean stainless steel wash & rinse arms
- Splash prevention & anti-contamination curtains
- User freindly control panel
- Back-flow prevention valve
- Rinse and Wash Economiser



This machine has a middle rail system, perfect to wash any crates to the max width 510mm and height 500mm. This machine can be ordered with optional (Turbo-blowers) Stage Dryer, Steam Condenser and Heat Recovery modules. Built-in stainless steel (AISI 316) washtank and boiler. Doors are counterbalanced with safety switch.

## TECHNICAL DRAWINGS

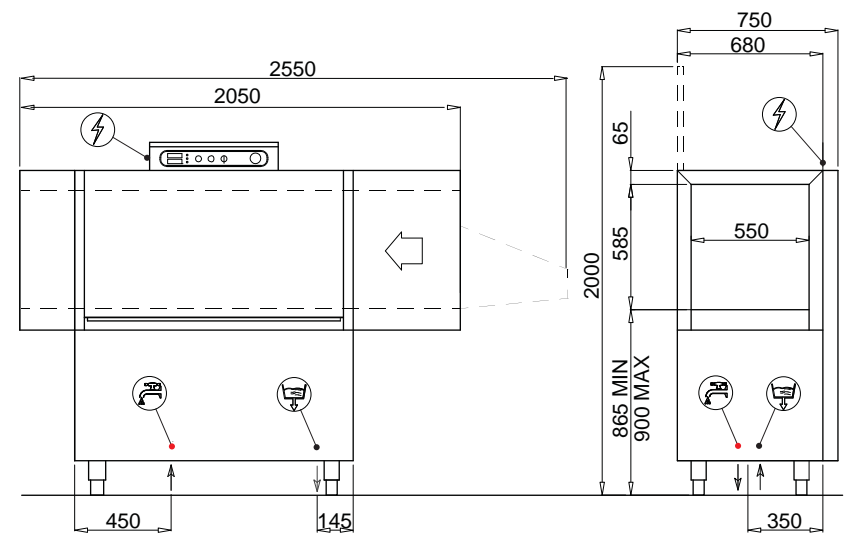

All details subject to change without notice

\*<sub>1</sub> Optional booster pump available if pressure below 200kPa; reducer required if over 600kPa

\*<sub>2</sub> Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

Call **Rhima Australia** today on **1800 659 292**

